

SLP200S-12U

High Efficiency Monocrystalline PV Module


- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.

60 Cell
MONOCRYSTALLINE MODULE

200W
POWER OUTPUT

20.00%
MODULE EFFICIENCY

5%
POSTIVE TOLERANCE

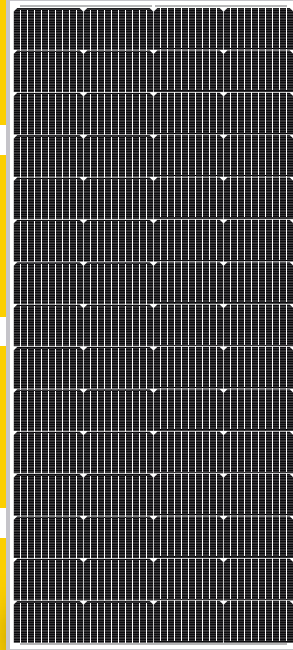

High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High PID Resistance

Advanced cell technology and qualified materials lead to high resistance to PID



Efficient Sorting Process


System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Withstands Harsh Environment



High PID resistance
5400 Pa positive load
2400 Pa negative load
Salt mist (IEC 61701)

Performance Warranty

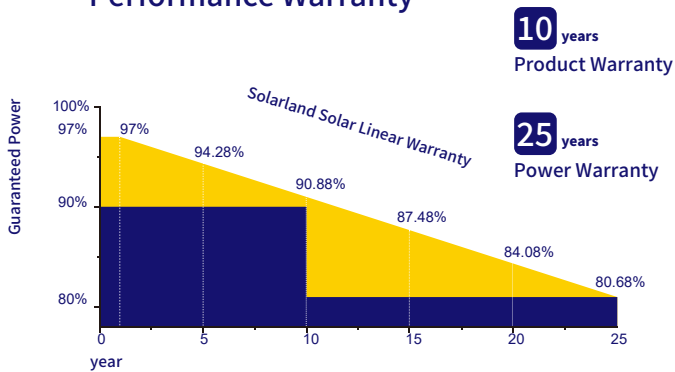

Product Certificate	IEC 61215, IEC 61730
Management Certificate	ISO 9001: 2016
Other certificate	Fire Rating Class C, TÜV Rheinland
Positive mechanical load	>5400Pa
Positive Power Tolerance	0~+5W
Warranty Information	2 Year Product Warranty and Workmanship



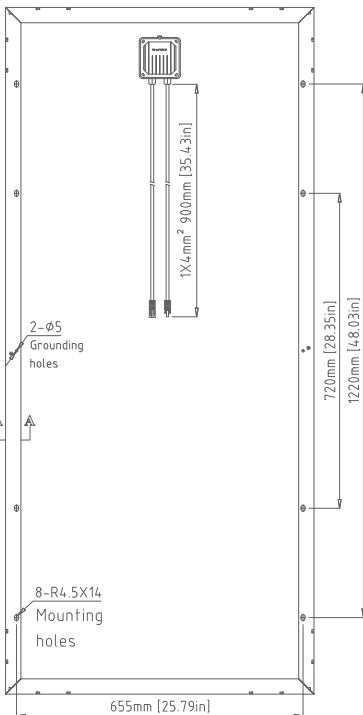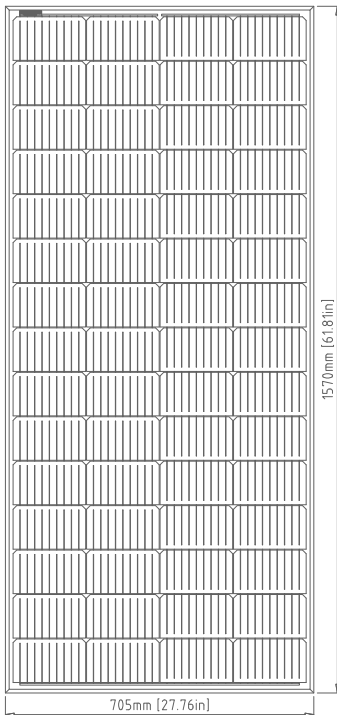


Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]


Electrical Characteristics	SLP200S-12U
Product code	200031201A
Maximum power (Pmax)	200W
Voltage at Pmax (Vmp)	16.86V
Current at Pmax (Imp)	12.33A
Open-circuit voltage (Voc)	19.60V
Short-circuit current (Isc)	13.00A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
*NOCT: Nominal operating cell temperature (the data is only for reference)

Specifications	SLP200S-12U
Cells	Monocrystalline silicon solar cell
No. of cells and connections	60(4X15)
Module dimension	1570mm[61.81in.]x705mm[27.76in.]x35mm[1.38in.]
Weight	12.00kg[26.00lbs]
Packing information(Carton)	1620mm[63.78in.]x755mm[29.72in.]x90mm[3.54in.]/(1pc/ctn)




Junction Box
Top View (Lid Open)



Section A-A

Characteristics

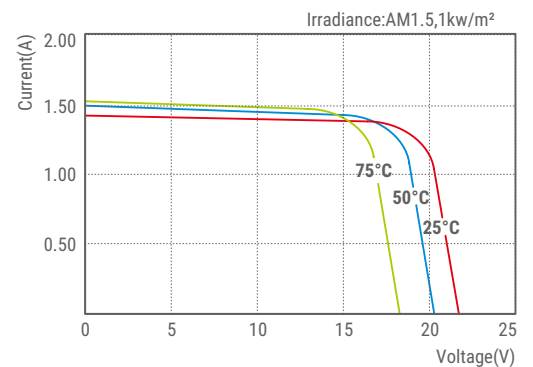

SLP200S-12U I-V Curves